



Owner's Manual

Dri-Pod™ Direct Flow Carpet Dryer

Original Instructions • Model F451 230V UK

DRI-EAZ PRODUCTS, LTD.

22 Plover Close, Interchange Park, Newport Pagnell, MK16 9PS
Tel: +44 (0)1908-611-211 Fax: +44 (0)1908-611-363 www.dri-eaz.co.uk

Patents: <http://www.LBpatents.com>

READ AND SAVE THESE INSTRUCTIONS



WARNING! To reduce the risk of fire or electric shock, do not use this fan with any solid-state speed control device.

WARNING! Unit must be grounded. Do not use with an extension cord. Connect only to an outlet provided with a ground fault interrupting device.

WARNING! Never operate a unit with a damaged power cord, as this may lead to electrical or fire hazards. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.

WARNING! Do not touch grills when unit is operating.

NOTICE: Keep motor dry. For indoor use only.

NOTICE: Unplug when not in use or when moving unit.

NOTICE: Do not allow children to play with or around the unit. Be sure the unit is inaccessible to children when not attended.

NOTICE: Always operate the unit on a stable, level surface so it cannot fall and cause injury.

WARNING! Do not alter or modify your Dri-Pod in any way. Use only replacement parts authorized by Dri-Eaz Products, Inc. Modifications or use of unapproved parts could create a hazard and will void your warranty. Contact your authorized Dri-Eaz distributor for assistance.


If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.

OPERATING INSTRUCTIONS

1. Unwrap the cord and plug the unit into a standard 230V outlet. CAUTION: Be sure switch is in the off position before connecting unit to power outlet.
2. Position the Dri-Pod in the center of an area to be dried. Switch on. The Dri-Pod can dry an area approximately 3 x 3 m.
3. When surface is dry to the touch, switch unit off and reposition the unit in the next section to be dried.
4. When finished, unplug the unit and re-wrap the cord in the cord wrap.

Transporting and Storing. Always use the handle to load or carry the unit. Units may be stacked for transport and storage. When transporting in a vehicle, secure the unit carefully to prevent sliding and damage to the unit and/or injury to vehicle occupants.

PARTS IDENTIFICATION

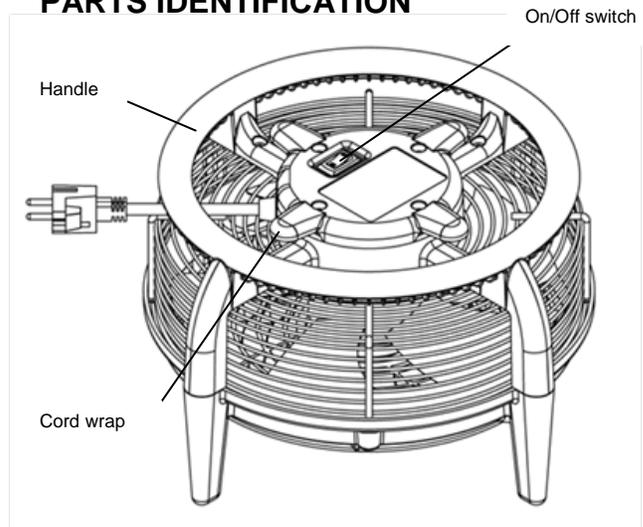

SERVICE

Dri-Eaz Products, Ltd.
22 Plover Close
Interchange Park
Newport Pagnell
MK16 9PS
United Kingdom
Tel. +44 (0)1908 611211 Fax. +44 (0)1908 611363

SPECIFICATIONS

Model	Dri-Pod F451-230V UK
Weight	4.6 kg
Dimensions (D x W x H)	38.5 x 38.5 x 22.5 cm
Amp draw	0.5A
Power	120W / 230V / 50Hz
Sound level (avg.)	73.43 dB
Control	On/Off switch
Cord length	3 m
Fan	5 blades
Construction	Injection molded housing, wire grill
Safety	CE
<i>Specifications are subject to change without notice. Some values may be approximate.</i>	