









TECNICAL FEATURES

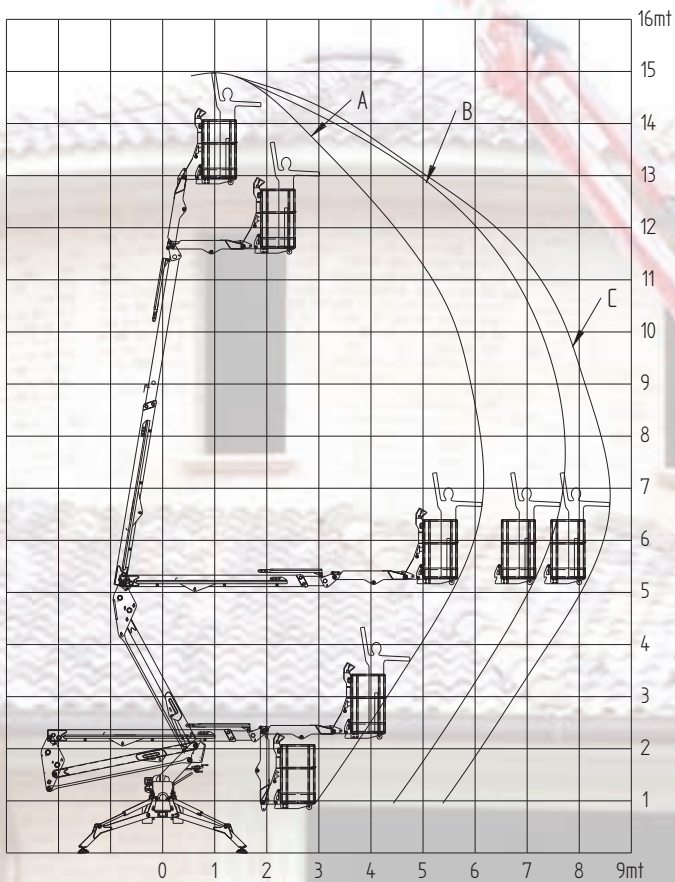

A=  KG 160
 KG 40
 Tot Kg 200

B=  KG 80
 KG 40
 Tot Kg 120

C=  KG 80
 Tot Kg 80

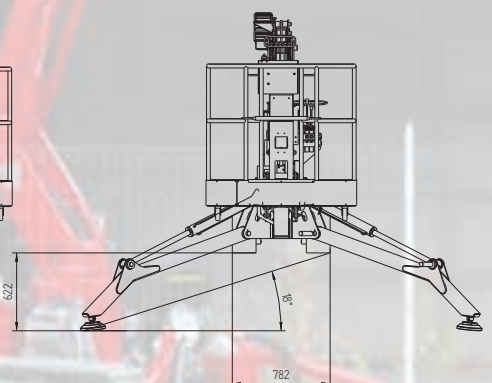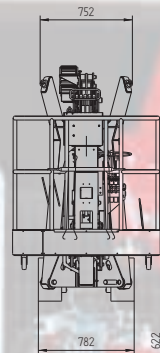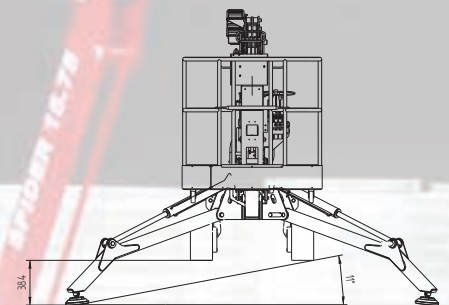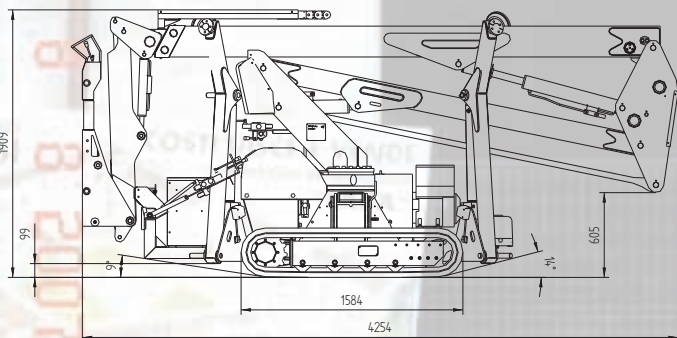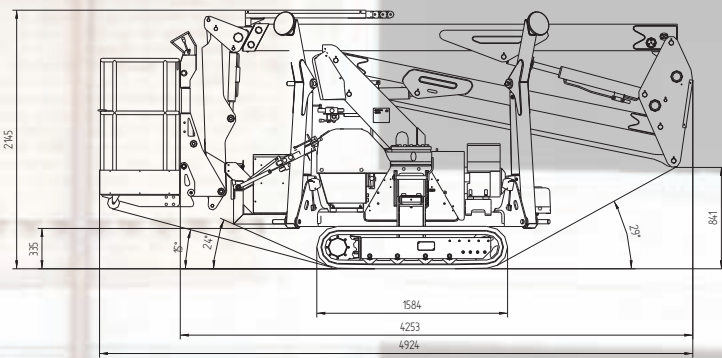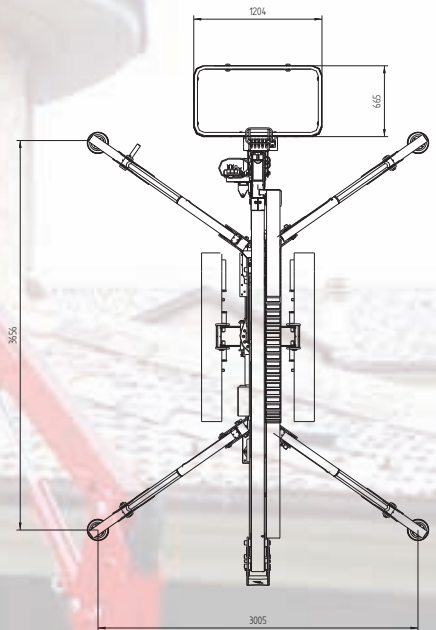



CARATTERISTICHE STANDARD
STANDARD FEATURES
CARACTERISTIQUES STANDARD

Pompa a mano d'emergenza
Emergency hand pump
Pompe manuelle d'urgence

Valvole di blocco su tutti gli attuatori
Lock valves on all the actuators
Valves de blocage sur les actuateur

Contaore
Hour meter
Computer-horaires

Interblocco bracci/stabilizzatori
Stabilisers/booms interblock
Interblocage stabilisateurs/bras

Limitatore di momento
Limiting device system
Limiteur de deport

Cingoli in gomma nero
Black rubber tracks
Chenille en caoutchuc noir

Cingoli allargabili meccanicamente
Mechanical Extendible tracks
Extensible Chenilles mecanique

OPTIONALS/OPTIONALS/OPTIONS
Elettropompa 110/220/380 V
110/220V/380V Motor pump
Electropompe 110/ 220/380V

Elettropompa d'emergenza 12 V
Emergency motor pump 12V
Electropompe d'urgence 12V

Pres a aria acqua in navicella
Air water outlet in the cage
Prise air eau dans le panier

Pres a di corrente 220V in navicella
220V outlet in the cage
Prise electrique dans le panier

Cingoli antitraccia
No marking tracks
Chenilles pas marquants

Colori personalizzati
Personal colours
Couleur personnalisee

Kit anticollisione
Anti-collision kit

CARATTERISTICHE TECNICHE
TECHNICAL FEATURES
CARACTERISTIQUES TECHNIQUES

Altezza di lavoro
Working height
Hauteur de travail
15.00 m.

Altezza di calpestio
Working height to the basket floor
Hauteur de travail au plancher
13.00 m.

Sbraccio laterale
Side outreach
Deport laterale
8.50 m./ 80 Kg.
7.80 m./120 Kg.
6.00 m/ 200 Kg.

Rotazione torretta
Turret rotation
Rotation tourelle
359°
359°
359°

Dimensioni navicella
Cage dimensions
Dimensions panier
1.20x0.66x1.10 m.

Lunghezza massima
Length
Longueur
4.25/4.92 m.

Larghezza
Width
Largeur
Min. 0.78 m./Max 1.06 m.

Altezza a riposo
Height in stowed position
Hauteur a machine repliee
Min 1.91 m./Max 2.15 m.

Ingombro macchina stabilizzata
Overall dimensions with stabilised machine
Encombrement machine stabilisee
3.00x3.65 m.

Velocità traslazione
Driving speed
Vitesse de deplacement
0-2.0 Km./h

Pendenza massima
Gradeability
Pente max
24°

Portata massima
Max capacity
Max capacite
200 Kg.

Motore benzina
Petrol engine
Moteur a essence
9 Kw.

Motore Diesel
Diesel engine
Diesel moteur
6.8 Kw.

Peso totale macchina base
Total weight of the machine
Poids total de la machine
1850 Kg.