

THE JCB HYDRAULIC POWER TOOLS RANGE



World Class
Customer Support

POWERPACKS	929/92200	929/20000	929/16400	929/40043	929/40044	929/32000	929/32100	929/32400	929/32500	929/96800
Machine model	MICRO	COMPACT	BEAVER	BEAVER	BEAVER (Electric start)	TROJAN (20L)	TROJAN (Electric start)	TROJAN (30L)	TROJAN (Electric start)	MULTIFLOW
Engine	Honda GX 160	Honda GX 160	Honda GX 240	Lombardini 15LD		Honda GX 340		Honda GX 390		Briggs & Stratton Vanguard
Fuel	Petrol	Petrol	Petrol	Diesel		Petrol		Petrol		Petrol
Power HP	5.5	5.5	8	6.8		11		13		18
EHTMA category	C	C	C	C		C		D		C - D - E
Hydraulic flow litres/min (gal/min)	0 - 20 (0 - 5)	0 - 20 (0 - 5)	0 - 20 (0 - 5)	0 - 20 (0 - 5)		0 - 20 (0 - 5)		0 - 30 (0 - 6.6)		0 - 20, 30, 40 (0 - 5, 6, 6.6, 8.8)
Max pressure bar (psi)	87 (1300)	87 (1300)	138 (2028)	138 (2028)		138 (2028)		138 (2028)		138 (2028)
Weight kg (lb)	33 (73)	40 (88)	60 (132)	83 (183)	92 (203)	85 (187)	94 (207)	87 (192)	96 (212)	93 (205)
Height x width x length mm	480 x 435 x 630	505 x 495 x 630	610 x 530 x 720	655 x 640 x 780		735 x 590 x 810	735 x 590 x 880	735 x 590 x 810	735 x 590 x 880	735 x 590 x 810
Height x width x length in	19 x 17 x 25	20 x 19 x 25	24 x 21 x 28	26 x 25 x 30		29 x 23 x 32	29 x 23 x 35	29 x 23 x 32	29 x 23 x 35	29 x 23 x 32
Hydraulic oil capacity litre (gal)	3.3 (0.8)	5 (1.1)	5 (1.1)	5 (1.1)		7 (1.5)		7 (1.5)		7 (1.5)
Fuel capacity litre (gal)	3.6 (0.8)	3.6 (0.8)	6 (1.3)	4.3 (0.95)		6.8 (1.5)		6.8 (1.5)		8.5 (1.9)
Oil cooler protection	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Full hydraulic filtration	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Balanced cooling system	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Easy maintenance access	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Lift-up handle for ease of handling	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Engine speed control	✓	✓	✓	✓	✓	✓	✓	✓	✓	Standard
Optional flow controller		✓	✓	✓	✓	✓	✓	✓	✓	✓
Strong tubular stainless steel frame	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Powder coated frame	✓	✓	✓	✓	✓					
Transistorised ignition	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Oil alert engine shutdown	✓	✓	✓			✓	✓	✓	✓	
Rough-terrain wheels						✓	✓	✓	✓	✓
Heavy duty front castor with brake						✓	✓	✓	✓	✓
Main hoses	Permanently coupled 5m length of 13mm bore light-weight siamesed hose with flat faced dripless couplings.	Permanently coupled 5m length of 13mm bore light-weight siamesed hose with flat faced dripless couplings.	Detachable 7m length of 13mm bore heavy-duty siamesed hose with flat faced dripless couplings.							
Tool suitability	Up to 22kg breakers: 929/30900, 929/92500, 929/92600; Demolition pick 929/30800 & Class C submersible pump 929/03900.	Up to 22kg breakers: 929/92500, 929/92600; Demolition pick 929/30800 & Class C submersible pump 929/03900.	All Category C tools.				All Category D tools.			All Category C, D and E tools.

POWER TOOLS

JCB produce a range of rugged, high quality power tools to ensure you get the best out of our powerpacks.

Designed for long, trouble-free life, they offer an unbeatable power-to-weight ratio, while at the same time being quiet in operation and light and manageable to use.

Furthermore, the extensive range covers a broad spectrum of applications. So, whatever your requirement, JCB has what you need.



BREAKERS



Pound for pound, blow for blow, the JCB range of breakers is the best for demolition and breaking work. They'll power their way through most jobs.

Thanks to their excellent power-to-weight ratio, our breakers will give amongst the best performance of any type of breaker in their class.

In addition they boast the following advantages:

- Very robust cast steel construction for strength
- High reliability and long service life, thanks to their having only two moving parts and constant lubrication by hydraulic oil
- Sealed hydraulic system resulting in low noise (no exhaust port) and elimination of freezing problems
- Practical design for ease of servicing. Removal of just two bolts gives full service access and no special tools are required
- 'Vibro Damped' handles which give amongst the lowest vibration levels of any equivalent breaker

Additionally, we offer an extensive range of long life steels to allow you to tackle a wide variety of tasks. These include moils, chisels, asphalt cutters and rammer pads.

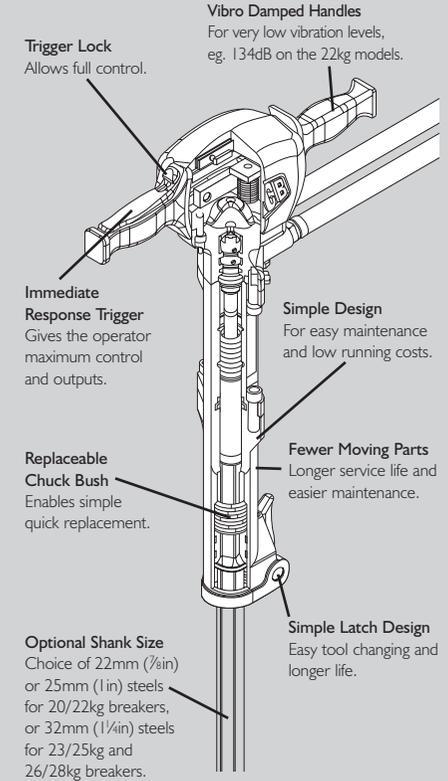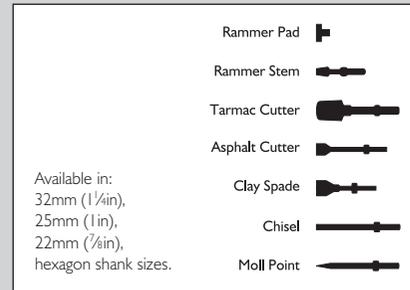

Model No.	Handle Type	Weight kg (lb)	Steel Size Across Flats x Distance to Collar	Flow Range lts/min (gpm)	Pressure Range bar (psi)	Blow Freq. blows/min	Vibration	Sound Power Level dB Lwa
929/92500	Vibro Damped	21 (46)	22 x 82mm (7/8 x 3 1/4in)	18 - 22 (4 - 5)	69 - 86 (1000 - 1247)	1500	3.4m/s ²	106
929/92600	Vibro Damped	22 (48)	25 x 108mm (1 x 4 1/4in) *	18 - 22 (4 - 5)	69 - 86 (1000 - 1247)	1500	3.4m/s ²	106
929/92400	Vibro Damped	25 (55)	32 x 160mm (1 1/4 x 6 1/4in)	18 - 22 (4 - 5)	90 - 110 (1305 - 1595)	1500	4m/s ²	109
929/92700	Vibro Damped	29 (64)	32 x 160mm (1 1/4 x 6 1/4in) **	18 - 22 (4 - 5)	90 - 110 (1305 - 1595)	1500	5m/s ²	108
929/92900	Vibro Damped	29 (64)	32 x 160mm (1 1/4 x 6 1/4in) **	28 - 32 (6 - 7)	90 - 110 (1305 - 1595)	1450	5.9m/s ²	110
929/12900	'D' Handle Pick 22mm (7/8in) c/w screw retainer	12 (26)	22 x 82mm (7/8 x 3 1/4in)	15 - 22 (3 - 5)	50 - 65 (725 - 942)	1500	6m/s ²	106
929/30800	'D' Handle Pick 22mm (7/8in) c/w latch retainer	12 (26)	22 x 82mm (7/8 x 3 1/4in)	15 - 22 (3 - 5)	50 - 65 (725 - 942)	1500	6m/s ²	106
929/30900	'T' Handle Pick 22mm (7/8in) c/w latch retainer	14 (31)	22 x 82mm (7/8 x 3 1/4in)	15 - 22 (3 - 5)	50 - 65 (725 - 942)	1500	7.5m/s ²	106

* 22 x 108mm (7/8 x 4 1/4in) also available to order. ** 28 x 150mm (1 1/4 x 6in) also available to order

														
	D Pick	T Pick	HM22	HM25	HM29	HM29 30ltr	Disc Cutter	Drill	Impact Drill	4" Trash Pump	2" Pump	2" Pump 30ltr	Earthdrill	Core Drill
	929/12900	929/30900	929/92500	929/92400	929/92700	929/92900	5024	5117	5118	5122	929/03900	929/04500	929/13400	929/13200
	929/30800		929/92600											929/13300
 MICRO	✓	✓	✓				✓	✓	✓		✓		✓	✓
 COMPACT	✓	✓	✓				✓	✓	✓		✓		✓	✓
 BEAVER	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓		✓	✓
 TROJAN 20ltr	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓		✓	✓
 TROJAN 30ltr						✓			✓	✓		✓		
 MULTIFLOW 40ltr	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
 JCB Machines	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓		✓	✓