


BOMAG

VIBRATING PLATES NON REVERSIBLE BP 6/30, BP 8/34

PERFORMANCE DATA

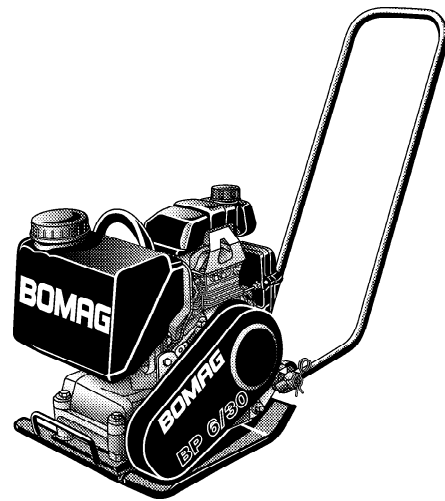

Machine type	Compaction output (m ³ /h) at recommended soil layer thicknesses		
	Gravel, sand	Mixed soil	Silt, clay
BP 6/30	7-10	7-10	
BP 8/34	10-14	10-14	


Machine type	Compaction output (t/h) at different asphalt layer thicknesses		
	2-4 cm	6-8 cm	10-14 cm
BP 6/30	3-7	9-12	
BP 8/34	3-7	9-12	

BOMAG

Technical Data

Shipping dimensions in m3

BP 6/30	0,069
BP 8/34	0,095

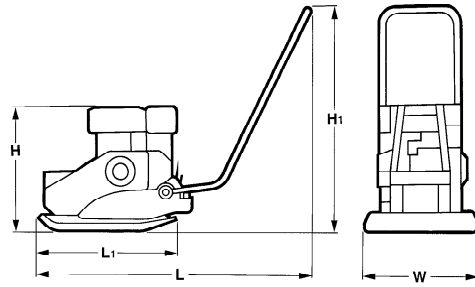

Standard Equipment

- Vibration insulated steering bow, foldable
- Steering handle with adjustable height
- Detachable steering handle
- Highly wear resistant base plate
- Maintenance-free transistor ignition
- Automatic shutdown at low oil level (BP8/34)
- Recoil starter
- Reinforced centrifugal clutch
- Lifetime lubricated vibration bearings
- Fully protected V-belt
- Carrying handles

Dimensions in mm

	H	H1	L	L1	W
BP 6/30	440	870	910	485	300
BP 8/34	453	870	970	545	340

Optional Equipment

- Sprinkler system
- Integrated transport frame
- Vulcolan mat
- Single point lifting device
- Tool kit (BP8/34)
- Special painting
- Service Kit (BP8/34)

Technical Data

Weights

Operating weight CECE	kg	49	54
Basic weight	kg	48	53

Dimensions

Working width	mm	300	340
---------------------	----	-----	-----

Driving Characteristics

Working speed, max.	m/min	20	22
Max. gradeability (depending on soil conditions)	%	30	30

Drive

Engine manufacturer	Honda	Honda
Type	GX 100	GX120
Cooling	air	air
Number of cylinders	1	1
Performance ISO 9249	kW	3,1
Speed	min-1	3.600
Drive system	mech.	mech.
Fuel	gasoline	gasoline


Exciter system

Frequency	Hz	90	90
Centrifugal force	kN	6	8

Capacities

Fuel	l	1,2	2,5
Water	l	6,5	6,5

Technical modifications reserved. Machines may be shown with options.



BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

BOMAG