


420 PODIUM ASSEMBLY & USER GUIDE

8. TO MOVE THE PODIUM - UNLOCK THE GATE, DISMOUNT, UNLOCK THE CASTORS AND RELOCATE IT TO THE NEW WORK PLACE. NOW RELOCK THE CASTORS, STEP BACK ON TO THE PLATFORM AND LOCK THE GATE SECURELY BEHIND YOU.
9. SAFE WORKING LOAD ON WORK PLATFORM 150KG OR ONE MAN PLUS HAND TOOLS.
10. DO NOT OVER REACH WHEN WORKING ON THE PLATFORM AND USE MINIMAL HORIZONTAL FORCE.
11. WORK ONLY AT A COMFORTABLE ARMS LENGTH.
12. DO NOT UNDER ANY CIRCUMSTANCES MOVE THE PODIUM WITH ANYONE ON IT OR PULL YOURSELF ALONG ON IT.
13. NEVER WORK ON THE PLATFORM WITHOUT CLOSING AND LOCKING THE GATE.
13. NEVER PUT ANYTHING ON THE PLATFORM TO GAIN EXTRA HEIGHT - STAND ONLY ON THE WORK PLATFORM.
14. NEVER USE DAMAGED OR INCOMPATIBLE EQUIPMENT
15. IF IN DOUBT ABOUT ANY APPLICATION, DO NOT GUESS, CONSULT YOUR SUPERVISOR OR YOUR SUPPLIER.
16. SEE BELOW FOR SAFETY AND INSPECTION CHECKLIST.

420 PODIUM SAFETY & INSPECTION CHECKLIST TO BE CARRIED OUT AT LEAST ONCE A WEEK

CHECKLIST DESCRIPTION	DATE	CHECKED BY
CHECK CASTORS ARE FIRMLY FIXED AND LOCKING MECHANISMS ARE FUNCTIONING CORRECTLY. IF NOT, ADJUST TO SUIT.		
CHECK STEP HOOK MECHANISMS ARE LOCKING CORRECTLY		
DECKING SHOULD BE CHECKED FOR DAMAGE AND FREE OF ANY MATERIAL LIKELY TO CAUSE SLIPPING ie OIL, etc.		
CHECK PIVOT BOLTS ARE SECURE AND ALLOW FREE MOVEMENT		
TEST CENTRE LOCKING MECHANISMS ARE FUNCTIONING CORRECTLY		
TEST GATE FOR MOVEMENT AND LOCKING ON VERTICAL ABOVE PIN		
CHECK ALL WELDS FOR CRACKS AND TUBE DAMAGE		
CHECK ALL LABELS ARE FIXED AND READABLE.		
CHECK THAT ERECTED STEPS ARE USED ON A LEVEL SURFACE.		

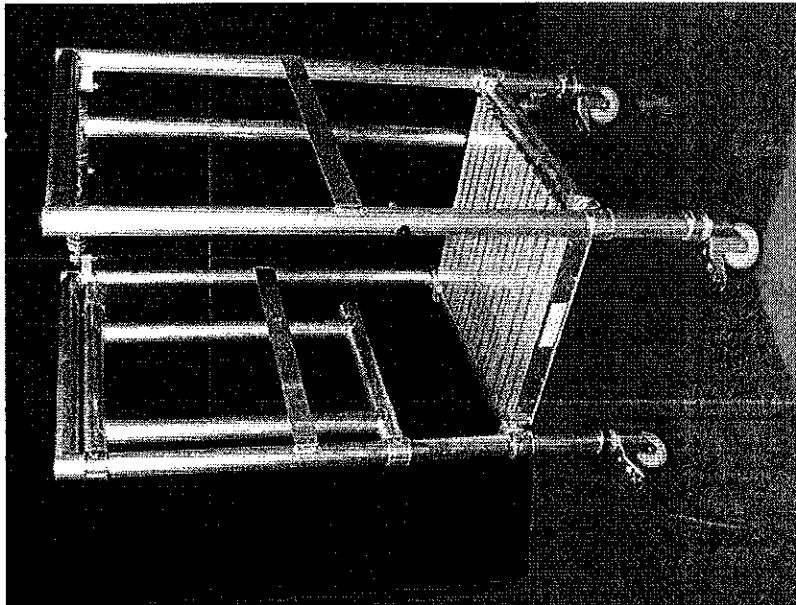


Dimensions — Erected Height -142cm x Width - 65cm x Depth - 73cm
 Dimensions — Folded Height -142cm x Width - 25cm x Depth - 73cm
 Weight—19kg Safe Working Load - 150kg
 Manufactured under an ISO9001:2008 Quality System
 Complies fully with the Working at Height Regulations 2005
 Lightweight all Aluminium Construction

For further information or assistance, please contact:
 sales@interfrankalloy.co.uk Tel: 01992 716509
 Or visit: www.interfrankalloy.co.uk

STORE THE PODIUM SOMEWHERE CLEAN, DRY AND SAFE

420 PODIUM ASSEMBLY AND USER GUIDE

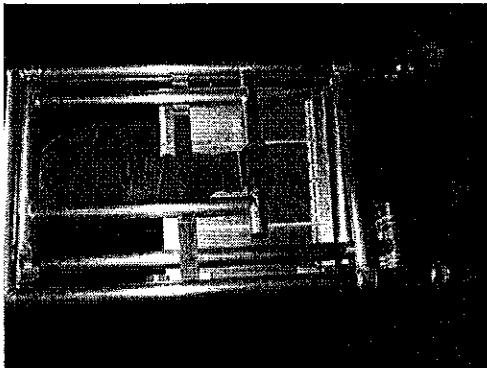



1. EASY TO CARRY OR WHEEL TO SITE (WEIGHS ONLY 19KG)





4. POSITION UNIT IN PLACE FOR WORK & LOCK BRAKES ON ALL FOUR CASTORS




2. OPEN OUT AND LOCK BOTH FOLDING JOINTS IN PLACE (LOCATED AT THE REAR OF THE PODIUM)

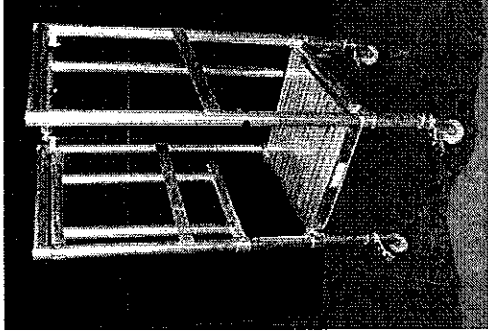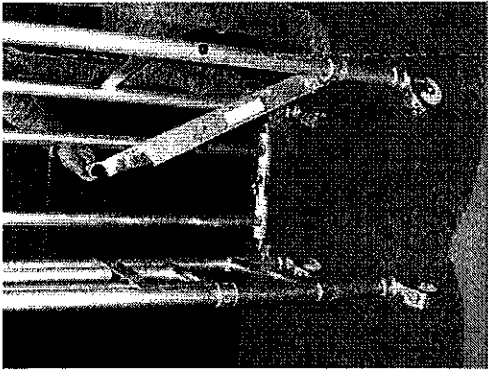

3. LOCATE CAPTIVE or INDIVIDUAL PLATFORM ON LOWER HORIZONTAL RUNGS AS SHOWN ABOVE

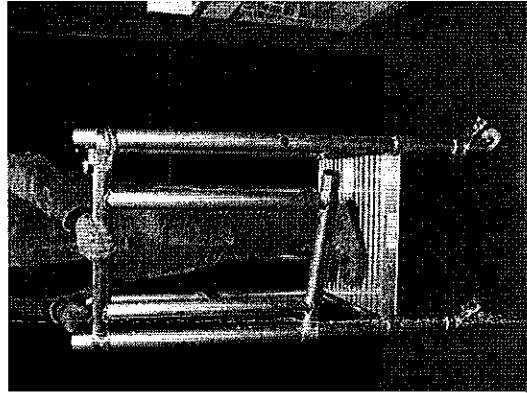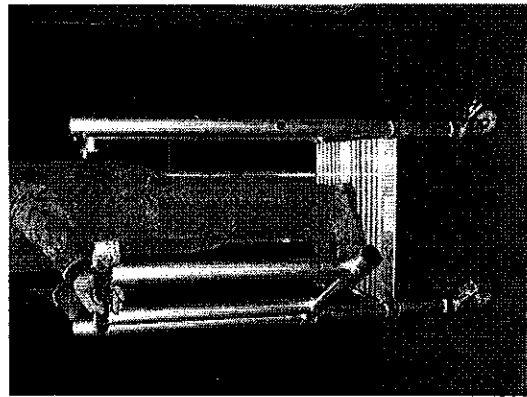

5. & 6. STEP ON TO PLATFORM, SWING GATE CLOSED BEHIND YOU AND LOCK GATE HOOK SECURELY ON TO THE VERTICAL OF THE FRAME

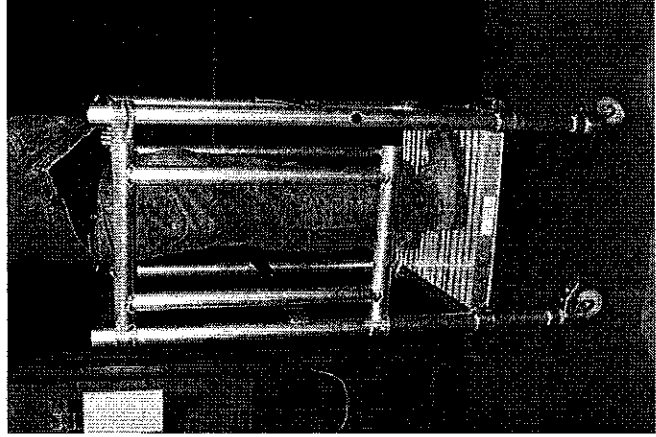

7. TO DISMANTLE, REVERSE PROCEDURES 1-6 ABOVE

BEFORE USE ALWAYS

- Make sure you check the podium on every occasion
- Check that all castors move freely, brakes operate correctly and are securely fitted
- Check that all components are free from cracks or damage
- If in doubt do not use the podium