

Model ES1932

SCISSOR LIFTS



MORE ECONOMIC

- Electric power for zero emissions and near-silent running indoors.

MORE PRODUCTIVE

- Boost efficiency with direct electric drive.

MORE ACCESS

- Get into more places with compact dimensions and precise control system.
- Suitable for indoor and outdoor use to meet all your needs.

SMART DESIGN

- Enjoy industry leading upcycles so you can work longer with higher productivity.
- Standard USB charger and phone holster improve the operator experience.

Standard Features

- 0.86 m roll-out deck extension
- Fold Down Handrails, QuickFold
- Swing-out gate
- Removable platform console box
- Lanyard attach points
- Full proportional drive joystick control with integral thumb steer switch
- Proportional lift/lower speed control
- Joystick enable for lift and drive
- Load sensing system
- USB Charger & Phone Holder
- 4 x 6V 220 A/hr Deep Cycle Batteries
- Programmable "Personality" settings
- On-board self-diagnostic testing
- Swing-out battery/electrical compartment doors
- 27 amp automatic battery charger
- Dual motor direct electric front wheel drive & steer
- Dual wheel automatic brakes
- Emergency brake release
- Active Pothole protection system
- AC cable to platform
- Battery condition indicator
- Hour meter
- Lubrication free scissor arm bushings
- Manual descent
- Horn
- Automatic positive traction
- Lifting lugs
- Greaseless Kingpin Joints
- Slope alarm and light
- Tie down lugs
- Fork lift pockets

Standard Specifications

- | | |
|--------------------------------|---------------------|
| • Drive Motors | 24V Electric 1.1 kW |
| • Hydraulic Pump Motor | 24V DC/ 2.2 kW |
| • Batteries | 4 x 6V, 220Ah |
| • Charger (120/240V – 50/60HZ) | 27 Amp Automatic |
| • Hydraulic System | 7 L |
| • Tyres (Non-Marking Solid) | 323 x 100 |
| • Brakes | Electric/Friction |

Accessories & Options

- | | |
|--|---------------------------|
| • 6V- 220A/hr maintenance free AGM batteries | • Plugs & Sockets |
| • Clean Guard | • ClearSky Locate |
| • SkySense Level 1 | • ClearSky CAN |
| • All motion alarm | • Operator access control |
| • Descent alarm | • Mobile Control System* |
| • Panel Carrier | • Anti vandalism package |
| • Inboard pipe racks | • MDI (Ground) |
| • Amber beacon light | |



Model ES1932

SCISSOR LIFTS


Performance

• Working Height	7.8 m
• Platform Height - Elevated	5.8 m
A. Stowed Height	2.1 m
B. Platform Height - Lowered	0.98 m
C. Platform Railing Height	1.1 m
D. Stowed Height (Rails Folded)	1.63 m **
E. Platform Size (W x L)	0.64 m x 1.59 m
F. Deck Extension	0.86 m
G. Overall Width	0.81 m
H. Overall Length	1.74 m ****
I. Wheelbase	1.35 m
J. Ground Clearance	0.07 m
• Platform Capacity - Indoor	230 kg
• Platform Capacity - Outdoor	230 kg
• Capacity on Optional Deck Extension	120 kg
• Lift/Lower Time	20/27 sec. ***
• Maximum Drive Height	Fully Elevated
• Machine weight *	1,565 kg
• Maximum Ground Bearing Pressure	8.01 kg/cm ²
• Drive Speed - Lowered	4.8 km/h
• Drive Speed - Elevated	0.8 km/h
• Gradeability	25%
• Turning Radius - Inside	Zero
• Turning Radius - Outside	1.69 m



* Certain options or country standards may increase weight and/or dimensions.
 ** Folding rails standard on all ES models in CE spec.
 *** Without load
 **** Incl ladder

Dimensions

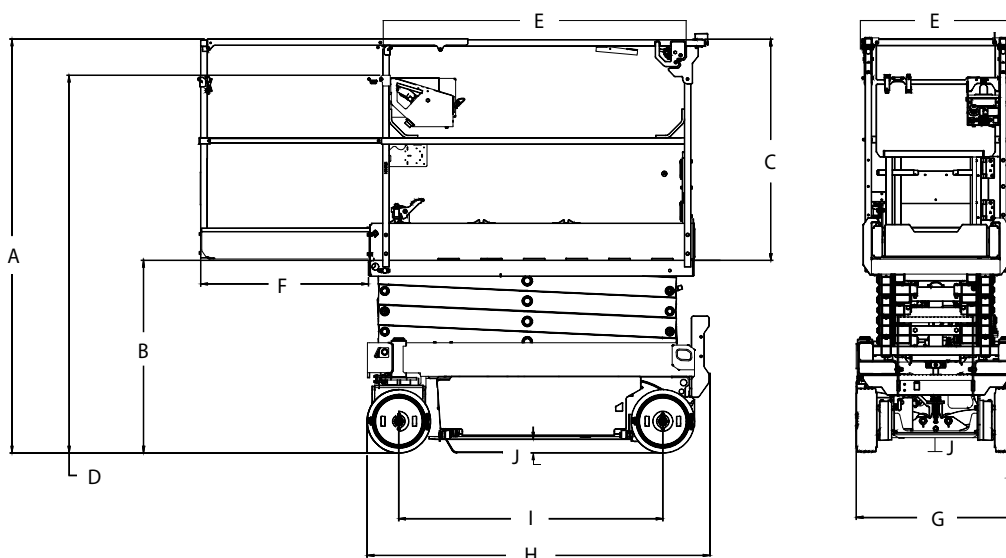

[@mrplanthireuk](#)
[mr_plant_hire](#)
[@mrplanthireuk](#)
[@mrplanthireuk](#)
 Head office: 120 Hertford Road, Enfield EN3 5AX | e: info@mrplanthire.co.uk

SCAN ME TO DOWNLOAD THE MPH APP
 EQUIPMENT INVENTORY | SPECIFICATIONS
 TUTORIALS | TRAINING | SUPPORT

020 8351 3434